

PROLOCK™




SCALABLE LOCKER SOLUTION

This access-controlled, flexible locker solution allows you to manage the distribution of both consumable items and valuable assets such as returnable hand tools and power tools. The ProLock includes individual lockers with configurable shelves so it can easily be customized on site. The ProLock allows for different combinations of locker sizes to expand for larger items including the ability to control access to specific lockers.

- Improve operational efficiencies
- Scalable solution
- Manage serial IDs, kits, and expendables
- Monitor calibrated items and schedules

ProLock Configurations

The ProLock locker solution is available in the standard 24-door and 12-door models and the compact 20-door model. The ProLock is field-configurable by simply linking the doors of each of locker together and removing shelves. This allows the capability to lock multiple doors at once. The ProLock can be a main or auxiliary unit.

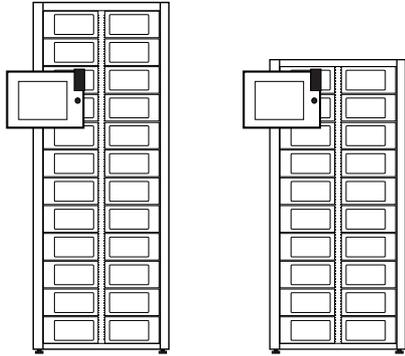


Standard ProLock

Compact ProLock

Linked Locker Dimensions

Locker	1	2	3
Height (in)	5.0625	11.1875	17.3125

Each locker width is 11 in and depth is 28.25 in
Optional locker combinations are available
Maximum locker capacity 70 lbs

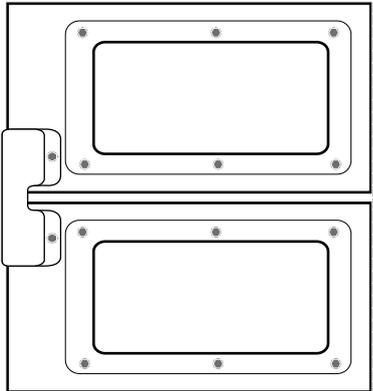

Locker doors are linked by overlapping brackets

Accessories

- Accessible power strip with 24 outlets allowing for a charging station within a ProLock
- LED lights for enhanced visibility

ProLock Issue Process

As in all CribMaster storage devices, the issuing and returning process of the ProLock is simple.

1. **Authenticate:** The user self-authenticates with an employee badge or other optional login methods and enters user-defined cost centers if required.
2. **Select:** Through the touchscreen interface, the user selects the item from the item image screen or item description displayed.
3. **Issue:** After selecting the issue function, the locker door opens, the user removes the item, and the database is automatically adjusted.
4. **Record:** The software records the transaction and the database is updated.

Software Functions

CribMaster Software

- Item/group level access
- ERP integration
- User-defined cost centers
- Track real-time data
- Manage calibrated items

Point-of-Use Interface (ATR)

- User specific multi-language support
- Favorite items list by employees
- Vend by item images

Suggested Product Types

The ProLock is ideal for storage of durable inventory such as:

- Power tools
- Hand tools
- Gauges



ProLock Specs

Standard Main Exterior Dimensions		
Height	83 in	210.82 cm
Width	34.25 in	86.995 cm
Depth	36.625 in	93.0275 cm
Standard Auxiliary Exterior Dimensions		
Height	83 in	210.82 cm
Width	29.875 in	75.8825 cm
Depth	32 in	81.28 cm
Compact Main Exterior Dimensions		
Height	70 in	177.8 cm
Width	30 in	76.2 cm
Depth	32 in	81.28 cm
Compact Auxiliary Exterior Dimensions		
Height	70 in	177.8 cm
Width	37 in	93.98 cm
Depth	36 in	91.44 cm
Weight		
Standard Main	515 lbs	233.6 kg
Standard Auxiliary	465 lbs	210.92 kg
Compact Main	498 lbs	225.889 kg
Compact Auxiliary	448 lbs	203.209 kg
Standard Shipping	550 lbs	249.476 kg
Compact Shipping	546 lbs	247.661 kg
Power Requirements		
Amps	3	3 (EU)
Voltage	120	220 (EU)
Operating Environment		
Temperature	-4°F to 140°F (-20°C to 60°C)	
Humidity	20% to 85% (no condensation)	
Technical Info		
CE compliant	Windows OS	



1955 West Oak Circle
 Marietta, GA 30062
www.cribmaster.com
 phone: 888.419.1399
 fax: 770.419.1968
sales@cribmaster.com